

PLINKA

Bloomer Pant

TGF-A4012

WWW.SEWTINAGIVENS.COM

OF COURSE YOU
NEED THESE BLOOMER PANTS
BASIC COLLECTION



FITS
XS... HIPS 38"
S..... 40"
M..... 42"
ML..... 44"
L..... 48"



Materials { Any Fabric

--- F A B R I C ---

44" WIDE 54" WIDE

1" WIDE

ELASTIC

XS,S,M,ML 2-5/8 YDS 2-1/8 YDS 28"*

L 2-5/8 YDS 2-1/4 YDS 34"*

1 SCRAP OF FABRIC ABOUT 3x8"***

LENGTH OF PANTS 34-36" BUT CAN BE ADJUSTED!

* MEASURE YOUR WAIST AND CUT THE ELASTIC 2" SHORTER. WRAP THE ELASTIC AROUND YOUR WAIST TO CHECK THE LENGTH FOR A FEEL GOOD FIT!

ROOMY BLOOMER PANT WITH ELASTIC WAIST

Pattern Preparation

SIMPLY PRINT OUT THIS PDF DOWNLOAD PATTERN ON LETTER SIZE PAPER

(8.5x11 IN US OR EURO SIZE)

Tape all the join lines together. It's that simple. For more info see instructions online at www.sewtinagivens.com

ONCE ALL TAPED TOGETHER SELECT THE SIZE YOU WISH TO MAKE, SEE OUR SIZE CHART AND CUT OUT YOUR PAPER PATTERN PIECES.

Cutting

You need to cut two pant legs from this pattern along the fold of the fabric. For 44" wide fabric you can get the binding strip out along the selvedge of the fabric. Then cut 4 widths of the fabric 5" wide for the ruffle pieces - ignore the pant ruffle pattern piece.

For 54" wide all sizes except L can get the ruffle strips and the binding strips out along the selvedge. For the L size cut the ruffle strips out along the selvedge but cut the binding pieces by cutting two widths of the fabric 1.5" wide. ignore the binding pattern piece.

All sizes cut the pockets out. ** And cut 1 scrap of fabric out according to the pattern piece - this could be a favorite vintage or floral fabric!!! Optional of course!

Sewing Instructions

NOTE: ALL SEAMS ARE 3/8" UNLESS OTHERWISE STATED!

- **POCKETS** - Hem the top edge of both pocket pieces by making a small rolled hem. Roll 1/4" and again 1/4" and stitch down. Place the pockets onto one side of the pant pieces along the pocket placement line, and stitch down using a zigzag stitch around the edges. If using the scrap patch, see fig.8. tuck it in on one side and zigzag that down too.
- Place both pant legs, right sides facing matching side edges, see fig.1. Stitch along both curved edges. Press.
- Place the crotch seams together and match the inner leg seam. See fig.2. and stitch. Press.
- Refer to the pattern piece for the PLINKA PLEATS, and mark them on your pant along the hem line - you should have 4 on each leg. Now make 3 1.5" pleats going upward see fig.3. Stitch. Make sure you end at the top of the top pleat, reverse your stitches to maintain a strong hold.
- Press both the binding strips, and the ruffle strips in half lengthwise, right sides facing outward. Press flat. Fig.4. Tuck in the side short edges and press again.
- Ruffle or make pleats along the raw edge of the ruffle strips as in fig.5. You should be pleating them to half of what they were.
- Place the binding strip onto the right side of the pant leg as in fig.6. raw edge to raw edge, right sides facing. Go around the leg, trim off any excess. Tuck in one short edge into the starting point. Baste in place.
- Add the ruffle strips along the hemline, raw edge to raw edge, but the ruffles go on the inside of the pant leg. See fig.6. Overlap the ruffles when you end one - you should have 2 ruffle strips per leg.
- Stitch through all layers around the pant legs.
- Press seam allowance upward, and the binding upward on the right side of the fabric. See fig.7.
- Stitch the binding down through all layers, see fig.7.

PLINKA

Bloomer Pant continued...



TGF-A4012

WWW.SEWTINAGIVENS.COM

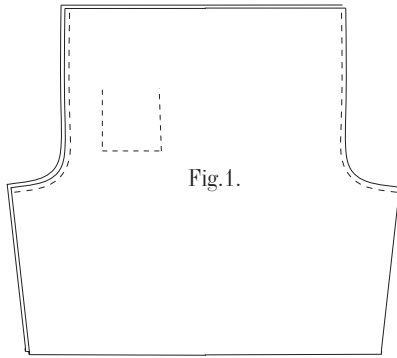


Fig.1.

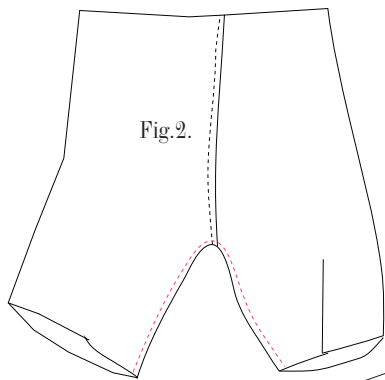


Fig.2.

Fig.3.




Fig.4.




Fig.5.




Fig.6.




Fig.7.

Fig.8.



© tina givens